



**FIRE CODE NOTE:**  
 ALL FIRE LANES,  
 TURNAROUNDS AND  
 ASSOCIATED  
 IMPROVEMENTS SHALL  
 COMPLY WITH THE  
 MOST CURRENT  
 VERSION OF THE  
 OREGON FIRE CODE  
 (OFC).

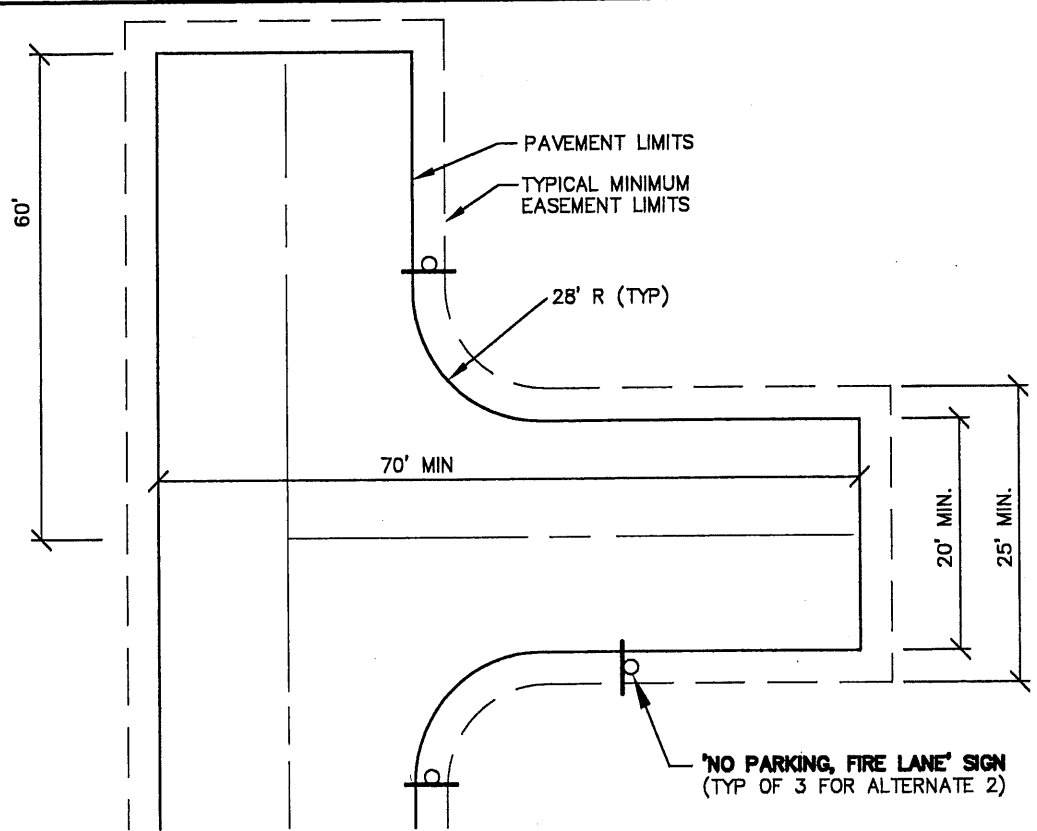

**ALT 2**

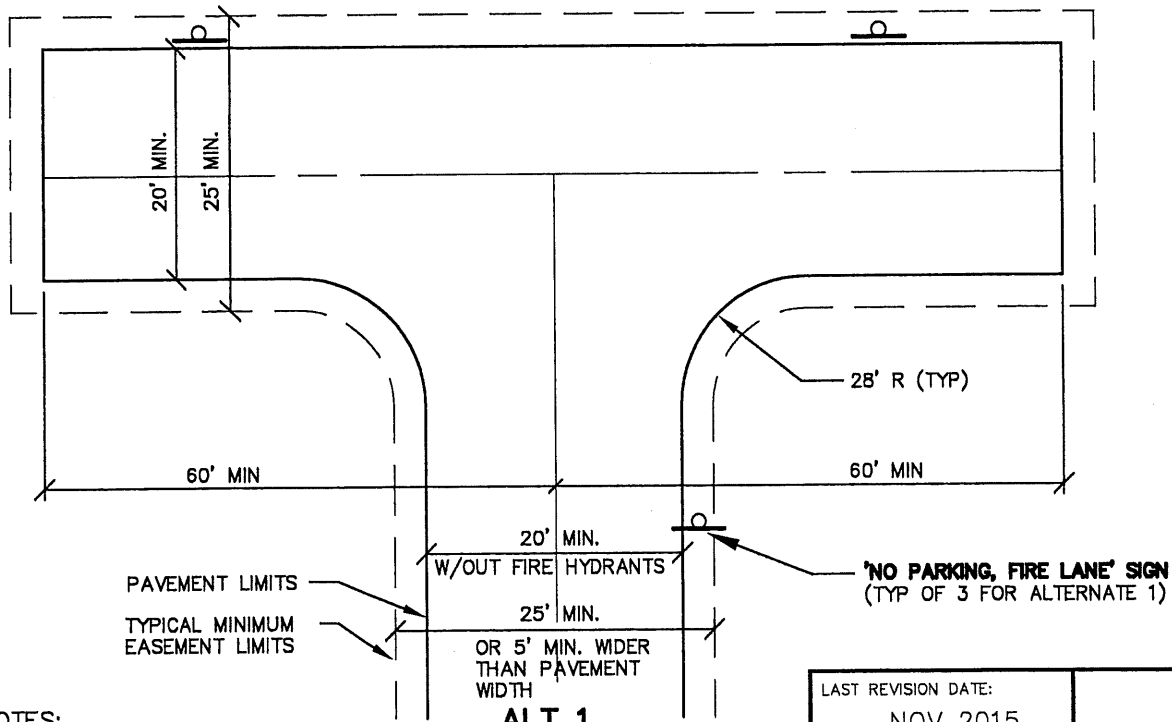

**ALT 1**

**NOTES:**

1. 'NO PARKING/FIRE LANE' SIGNS REQUIRED WITHIN LIMITS OF TURNAROUND AS SHOWN, & AT TYPICAL 50 FOOT MAXIMUM INTERVALS ALONG LENGTH OF FIRE LANE OR PER OFC REQUIREMENTS.
2. THESE ARE TYPICAL MINIMUM DESIGNS AS REQUIRED BY THE 2010 OFC D103.4 & FIGURE D103.1. ALTERNATE DESIGNS SHALL MEET THE APPROVAL OF THE LOCAL FIRE MARSHALL.
3. PAVEMENT DIMENSIONS SHOWN REFERS TO TOTAL DRIVABLE WIDTH BETWEEN CURBS IF PRESENT.
4. MIN. 26' PAVEMENT WIDTH AT FIRE HYDRANTS (OFC D103.1).

LAST REVISION DATE: NOV 2015	COPYRIGHT 1995 WESTECH ENGINEERING, INC.
<b>FIRE CODE/FIRE LANE HAMMERHEAD TURNAROUND (PRIVATE DRIVES ONLY)</b> (NTS)	
SILVERTON, OR	DETAIL NO. 220